



Specifications Model ALL200 and ALL300

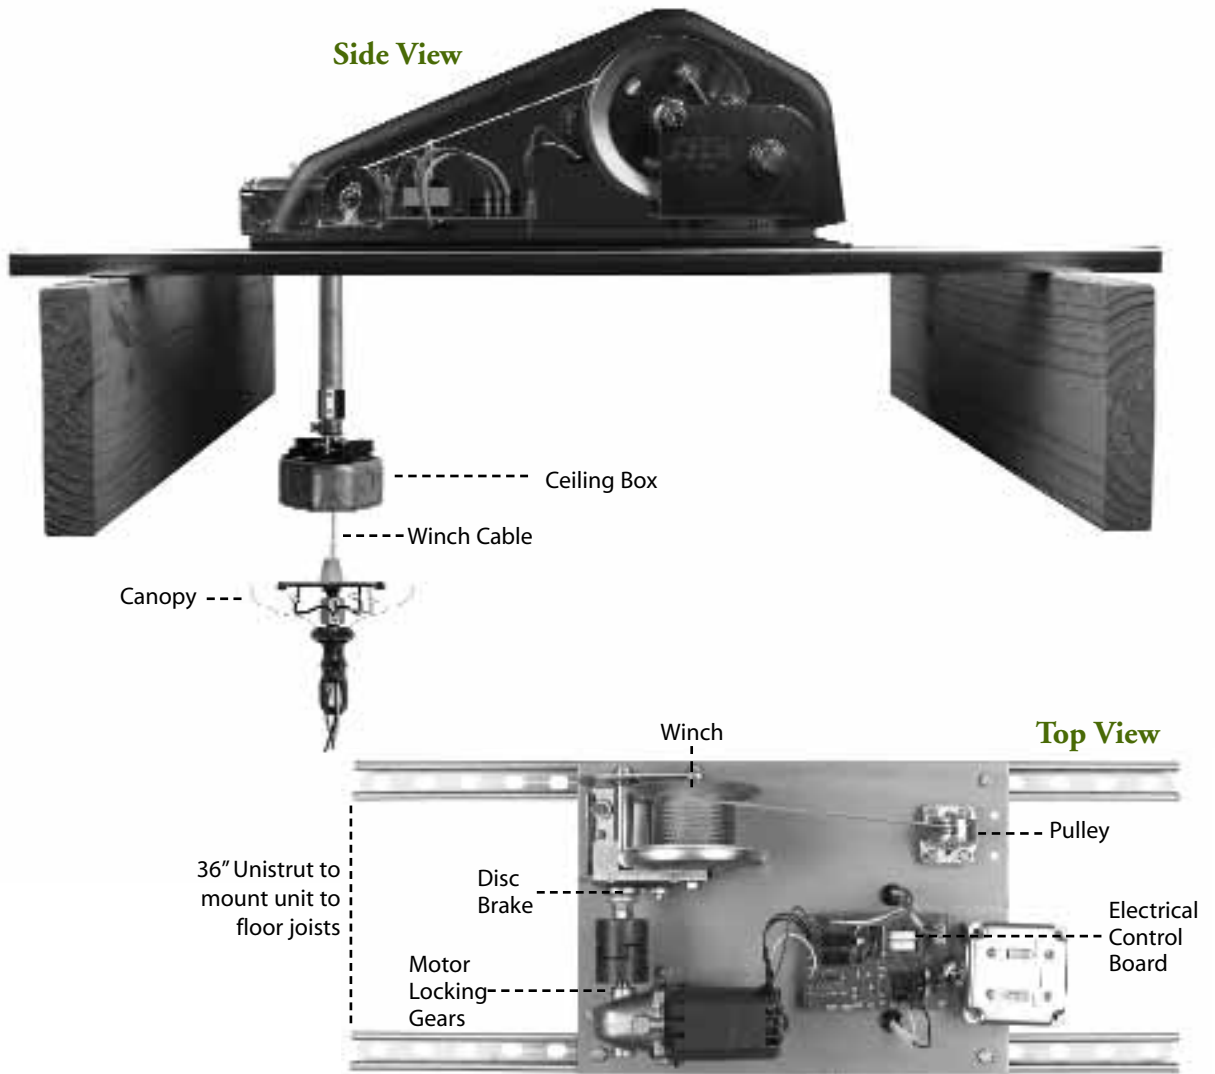

Maximum Lifting Capacity	Model ALL200- 200 lbs. Model ALL300 - 300 lbs.
Winch Cable Strength	1,800 lbs.
Winch Assembly	1,500 lb. maximum
Locking Mechanisms (2).....	1 disc brake on winch 1 brake on motor
Motor	120V AC (Must be on separate circuit from the lights)
Winch Cable Length	35 ft. standard; 65,90,120 ft. optional
Light Wattage Capacity.....	1 circuit - 1,560 watts (standard) <i>2 circuit packages can not be used with remote mount options</i> 1 circuit - 2,200 watts (optional) 2 circuit - 3,300 watts (optional) 2 circuit - 4,400 watts (optional)
Dimensions of unit.....	14" wide x 19" long x 9" high
Shipping Weight.....	47 lbs.
Remote mounting options available	65 ft. cable standard;Electrical wiring 25 ft. standard
SmartLift Controller	Optional
Relamping Cord	Optional (to temporarily relight chandelier at floor level)

Specifications Model ALL700 and ALL1000

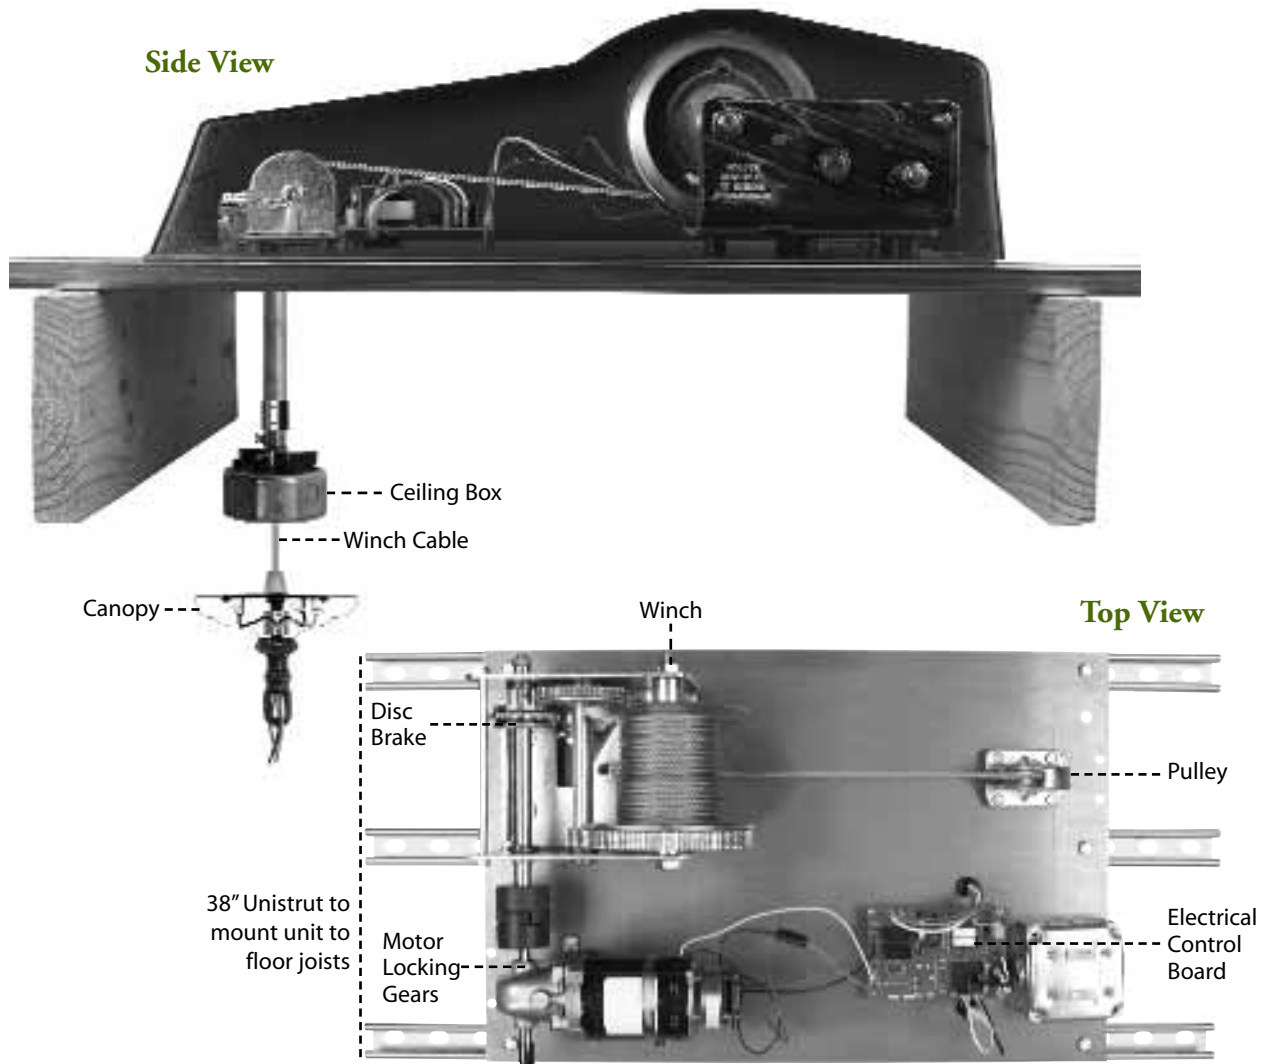

Maximum Lifting Capacity	Model ALL700- 700 lbs. Model ALL1000 - 1000 lbs.
Winch Cable Strength	3,000 lbs.
Winch Assembly	2,500 lb. maximum
Locking Mechanisms (2).....	1 disc brake on winch 1 brake on motor
Motor	120V AC (Must be on separate circuit from the lights)
Winch Cable Length	35 ft. standard; 65,90,120 ft. optional
Light Wattage Capacity.....	1 circuit - 2,200 watts (standard) 2 circuit - 3,300 watts (optional) 2 circuit - 4,400 watts (optional)
	<i>2 circuit packages can not be used with remote mount options</i>
Dimensions of unit.....	18" wide x 27 1/2" long x 9" high
Shipping Weight.....	Model ALL700- 93 lbs. Model ALL1000 - 103 lbs.
Remote mounting options available	65 ft. cable standard; Electrical wiring 25 ft. standard
SmartLift Controller	Standard
Relamping Cord	Optional (to temporarily relight chandelier at floor level)